



TORNADO / TORNADO BIG



Quarry Line

IT

Il sistema pneumatico di abbattimento polveri TORNADO protegge il personale addetto e l'ambiente circostante dalla polvere prodotta durante la perforazione.

L'unità TORNADO viene fornita completa di un tubo ad alta resistenza all'abrasione del diametro di 50 mm che consente un raggio operativo di 8 m alla cui estremità, mediante una cuffia in gomma, vengono aspirate le polveri prodotte dall'utensile.

Le polveri prodotte durante la perforazione vengono convogliate nell'apposito sacco di raccolta, posto sotto il macchinario.

ENG


The Tornado pneumatic dust collector system protects operators and the surrounding environment from dust produced during drilling.

The Tornado unit is supplied complete with a highly abrasion-resistant hose with a diameter of 50 mm that provides an operating radius of 8 m and suctions the dust produced by the tool through a rubber hood on its end.

The drilling dust is conveyed to a collection bag located under the machine.




TORNADO

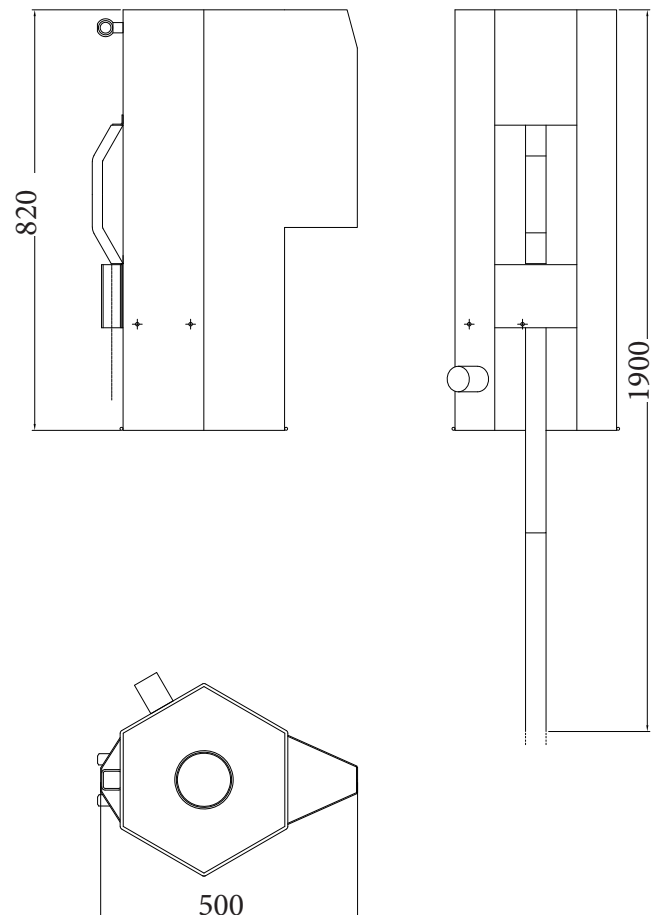

MODELLO: MODEL:	TORNADO	TORNADO BIG	
----------------------------	----------------	--------------------	--

Applicazione Application	N.1 asta 25-51 mm N.1 drill rod 25-51 mm	N.2 aste 25-51 mm N.2 drill rods 25-51 mm	N.1 Martello Fondo Foro 76-105 mm N.1 DTH hammer 76-105 mm
Superficie filtrante Filtering surface	2.5 m2	5 m2	5 m2
Aspirazione Suction	3.6 m3/min	4.5 m3/min	4.5 m3/min
Consumo d'aria Air consumption	0.3 / 1 m3/min	0.3 / 1.5 m3/min	0.3 / 1.5 m3/min
Pressione di utilizzo Operating pressure	6 / 7 bar	6 / 7 bar	6 / 7 bar
Peso Weight	18 kg (40 lbs)	30 kg (67 lbs)	30 kg (67 lbs)
Pulizia filtro Filter cleaning	Cartucce auto-pulenti Self-cleaning cartridge		
Silenziatore (Opzionale) Silencer (Optional)	Disponibile / Available		

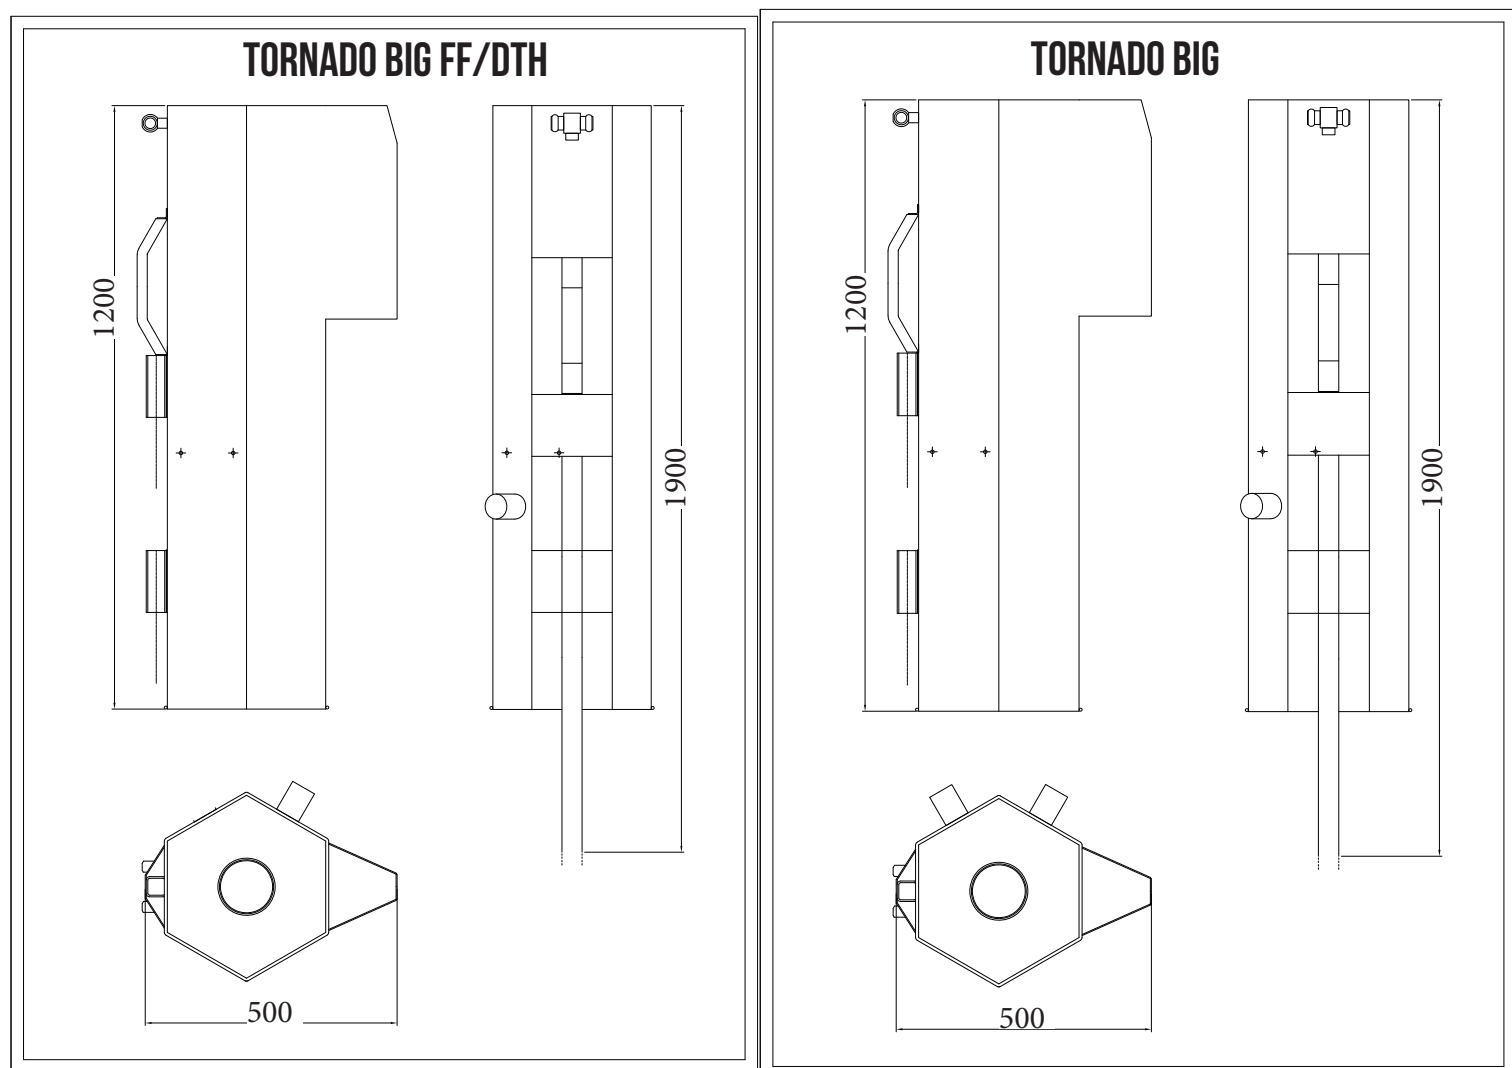



... working to grow together...

MARINI QUARRIES GROUP S.R.L.

Via Beura 44-28844 Villadossola (VB)-ITALY

Tel.+39 0324 575106 Fax. +39 0324 54096

Web site www.mariniqg.it

email: mariniqg@mariniqg.it

