
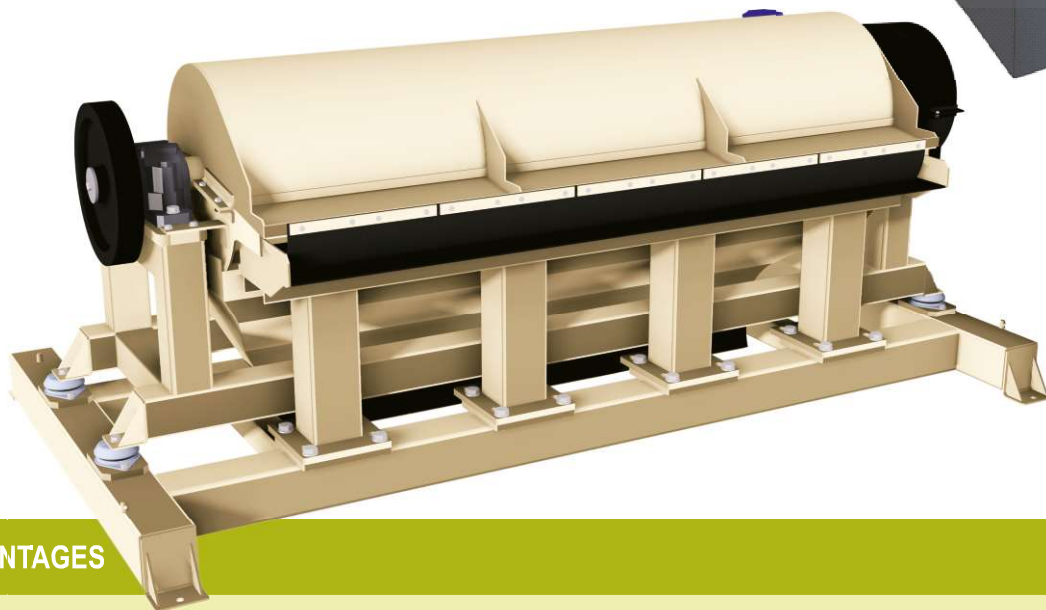


| Characteristics         | MM             |
|-------------------------|----------------|
| Power (kW/hp)           | 7,5/10         |
| Feed Opening (mm)       | 2200           |
| Dimensions (LxWxH) (mm) | 1750x3100x1250 |
| Anti Vibratory Supports | Sim            |
| Plate Thickness (mm)    | 80             |
| Weight (kg)             | 1900           |

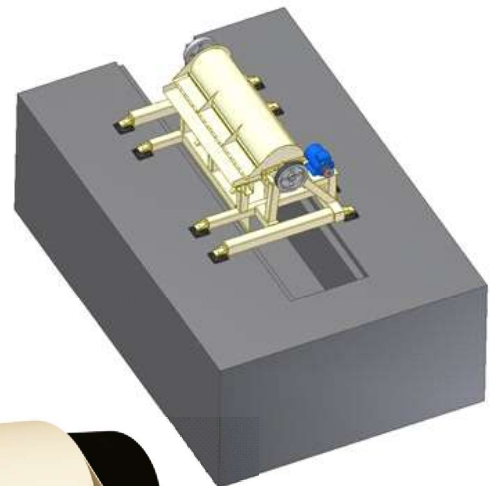

## ADVANTAGES

- Speed in clearing the machine feed.
- Automatic removal of residues.
- Reduces the space for residues in the line.
- Facilitates the movement of nonconforming material.